

HLD-P096 Desk/Wall Holder Mounting Instructions



Desktop Use

To fix the HLD-P096 to a desktop, use the double-sided adhesive strips following the steps below:

1. Carefully clean the surfaces of the desk and of the bottom of the HLD-P096 with alcohol to remove any impurities that could reduce the adhesion.
2. Remove the protective plastic from one side of the adhesive strips and stick them on the HLD-P096 bottom as shown in [Figure 1](#).
3. Remove the plastic from the other side of the strips and affix the HLD-P096 to the desk.

Wall-Mount Use

To mount the HLD-P096 to a wall, use the two threaded dowels and the self-tapping screws.

Follow the steps below:

1. Using the holder mounting holes ([Figure 2](#)) as a pattern, mark the wall where you desire to mount the HLD-P096.
2. Drill two appropriate-size holes.
3. Insert the threaded dowels into the wall holes.
4. Position the holder on the wall with the opening inclined upwards ([Figure 3](#)) and affix it by means of the two self-tapping screws.

General Features

The HLD-P096 is a plastic holder for the Power-Scan™ 9600 family bar code readers, designed to be mounted on a wall or fixed to a desk.

Installation

The mounting kit supplied with the holder contains the following components:

- 1 HLD-P096
- 2 self-tapping screws
- 2 threaded dowels
- 2 adhesive strips

Figure 1



Figure 2

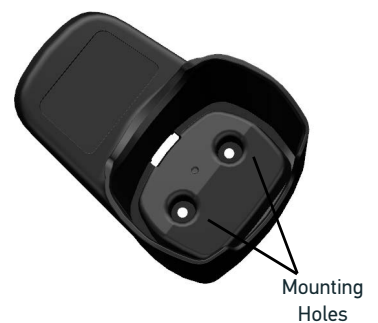


Figure 3

